


EAST ABUTMENT PILING LAYOUT

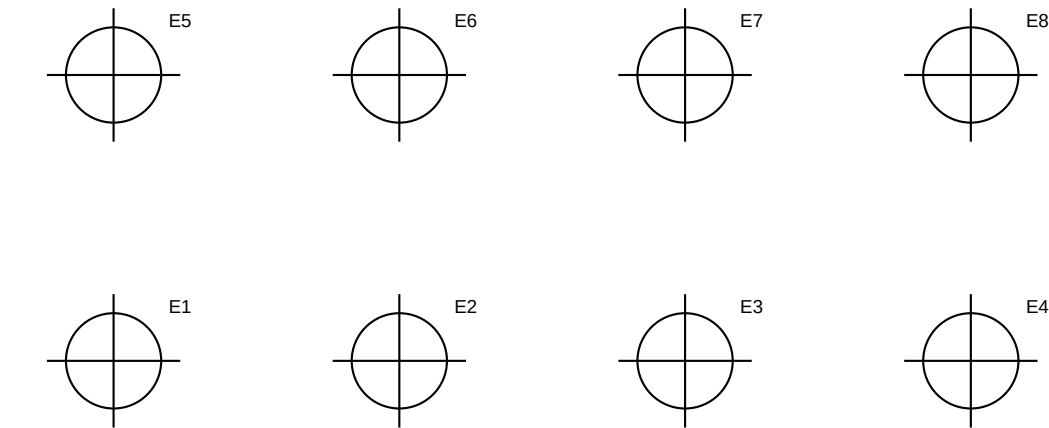

- NOTES**
- 1. Pile positions set out from abutment centreline grid.
 - 2. Pile toe level -5.15 mAOD. Pile cut-off level +12.85 mAOD.

PILE SETTING-OUT

Pile	Easting	Northing	Cut-off (mAOD)	Toe (mAOD)
E1	452310.002	318420.005	+12.85	-5.15
E2	452312.698	318420.001	+12.85	-5.15
E3	452315.405	318419.993	+12.85	-5.15
E4	452318.102	318419.992	+12.85	-5.15
E5	452310.009	318422.693	+12.85	-5.15
E6	452312.691	318422.707	+12.85	-5.15
E7	452315.392	318422.695	+12.85	-5.15
E8	452318.099	318422.698	+12.85	-5.15

Rev	Date	Description
C01	01/03/2025	Issued for construction

Client: Northvale County Council
Designer: Arden Moss Consulting Engineers
Kestrel Valley Link Road
River Kest Bridge East Abutment Piling Layout
Drawing number: KVL-ADM-410-DR-S-0110
Revision: C01 Status: FC - For construction
Scale: 1:50 @ A1 Date: 1 March 2025
Drawn: LC Checked: PN Approved: DO