


POND PLAN

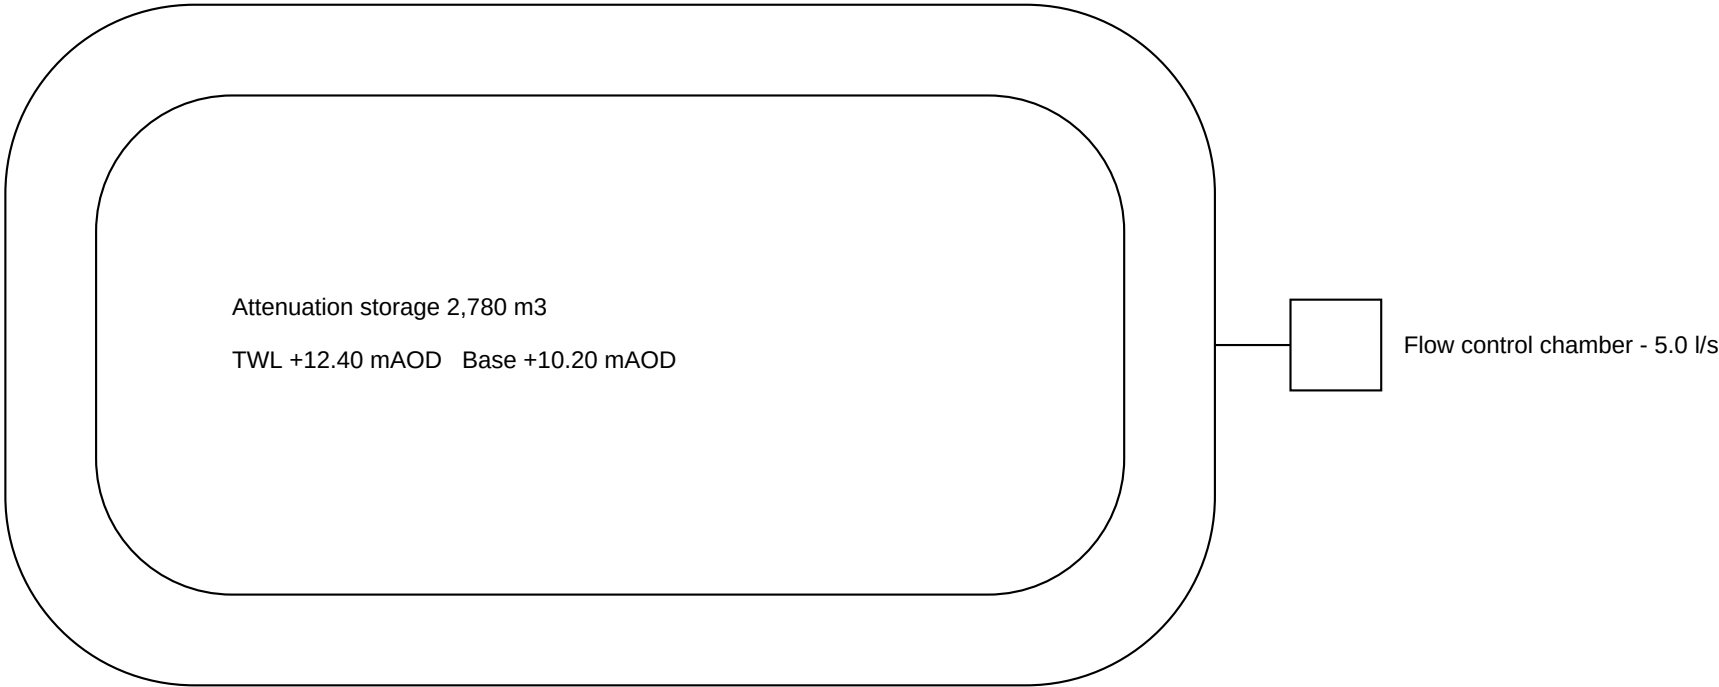

- NOTES**
- 1. Pond 2 East storage increased to 2,780 m3 for a 5.0 l/s discharge limit. See KVL-ADM-300-RP-D-0021.
 - 2. Base lowered to +10.20 mAOD and footprint extended north by 8 m. Top water level +12.40 mAOD.
 - 3. Flow control device to approved submittal KVL-CGC-320-SB-D-0009 P01.

Rev	Date	Description
C02	20/10/2025	Pond enlarged for 5.0 l/s discharge limit
C01	10/03/2025	Issued for construction
Client: Northvale County Council Designer: Arden Moss Consulting Engineers Kestrel Valley Link Road Pond 2 East General Arrangement Drawing number: KVL-ADM-320-DR-D-0320 Revision: C02 Status: FC - For construction Scale: 1:200 @ A1 Date: 20 October 2025 Drawn: SW Checked: DO Approved: PN		