



PLAN ON EAST ABUTMENT

ELEVATION ON EAST ABUTMENT

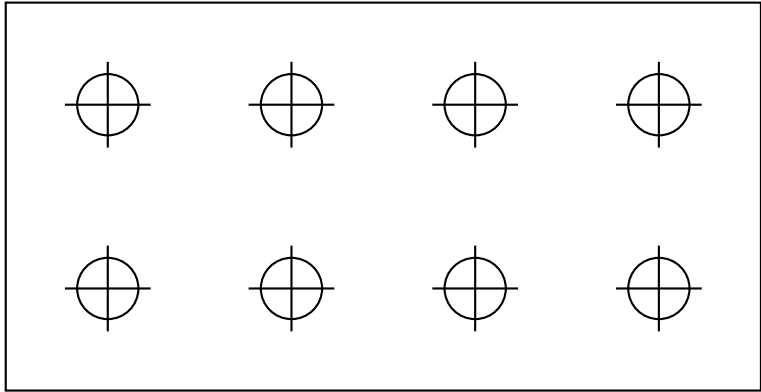

Pile cap 11.1 m x 5.7 m.

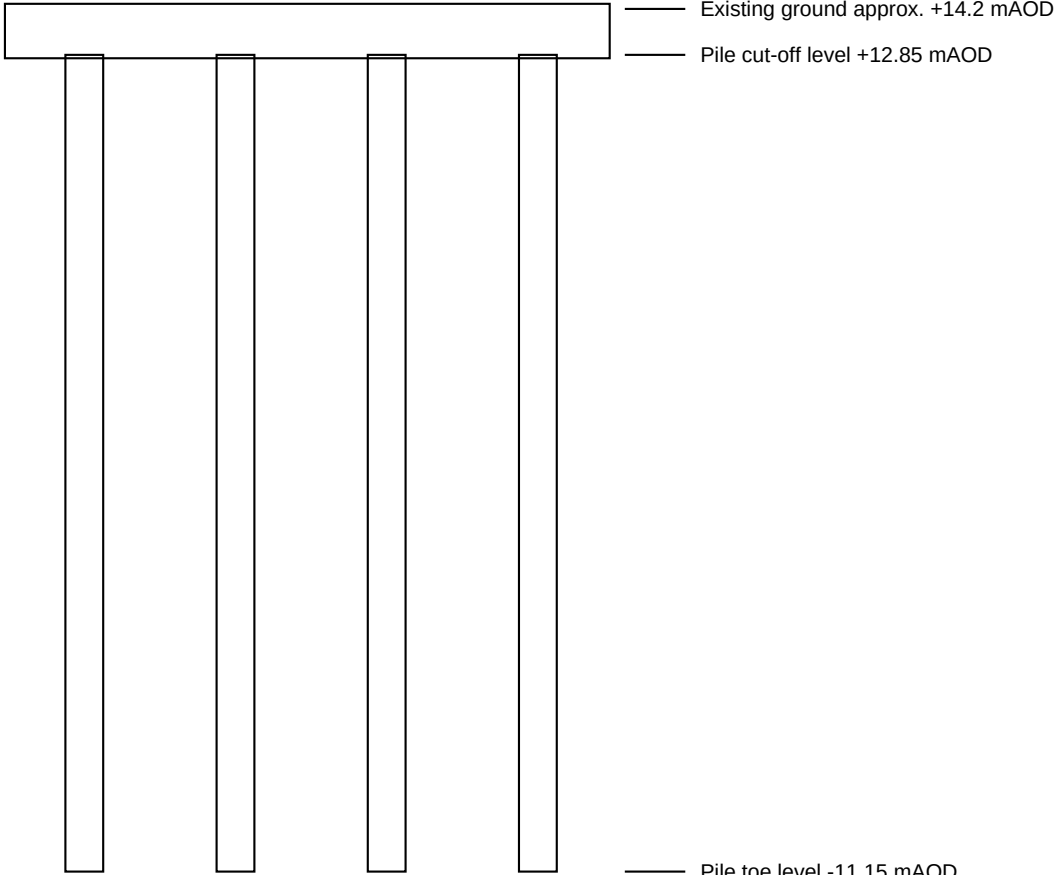

8 No. 900 mm dia. bored piles, 24.0 m long

- NOTES**
- 1. Proposed change - weep holes replaced by a geocomposite drainage layer.
 - 2. Issued for comment only. Revision C02 remains the construction issue.
 - 3. Piles unchanged from revision C02.

Rev	Date	Description
P03	02/10/2025	Proposed abutment drainage layer - for comment
C02	10/07/2025	Piles lengthened following RFI-0012
C01	01/03/2025	Issued for construction
P02	10/12/2024	Issued for review

Client: Northvale County Council
Designer: Arden Moss Consulting Engineers
Kestrel Valley Link Road
River Kest Bridge East Abutment General
Arrangement
Drawing number: KVL-ADM-410-DR-S-0102
Revision: P03 Status: FC - For construction
Scale: 1:100 @ A1 Date: 2 October 2025
Drawn: LC Checked: PN Approved: DO