



PLAN ON EAST ABUTMENT

ELEVATION ON EAST ABUTMENT

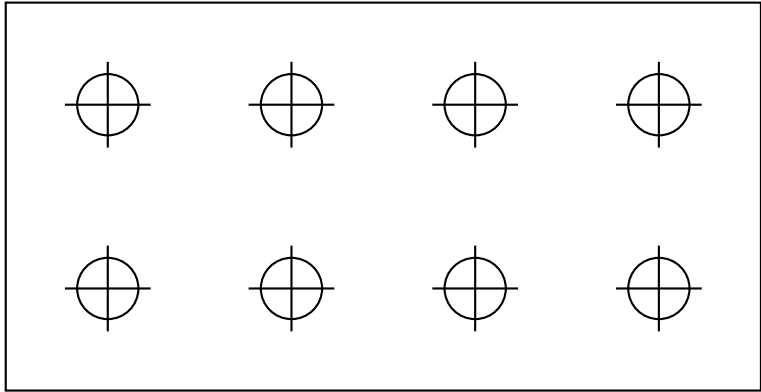

Pile cap 11.1 m x 5.7 m.

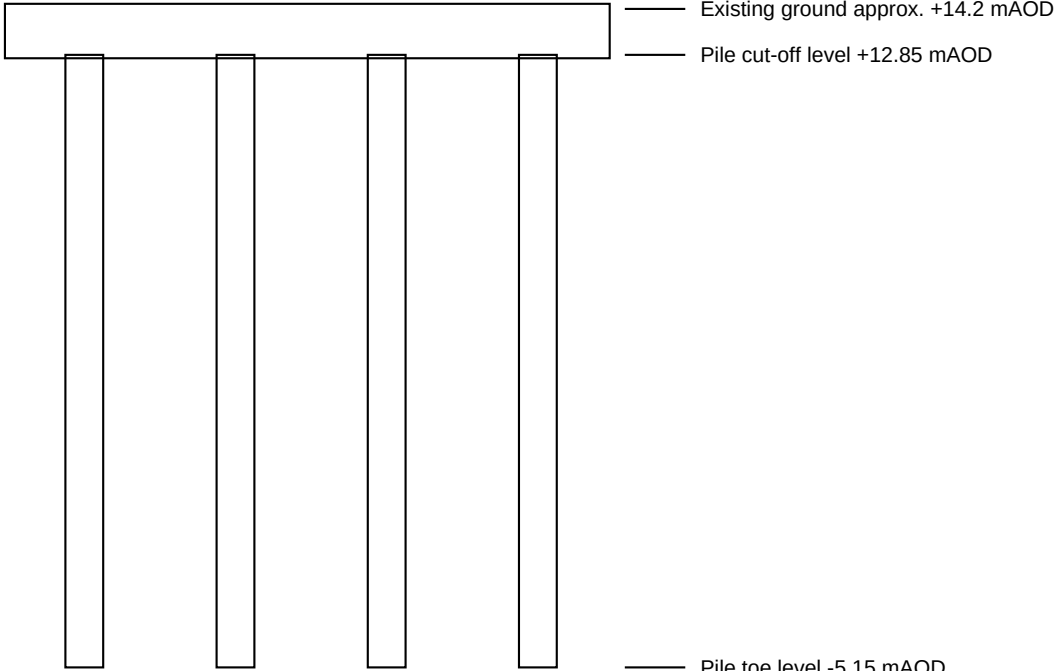

8 No. 900 mm dia. bored piles, 18.0 m long

NOTES

- 1. 8 No. 900 mm diameter bored cast-in-place piles, 18.0 m long.
- 2. Pile toe level -5.15 mAOD. Pile cut-off level +12.85 mAOD.
- 3. All levels in metres above Ordnance Datum (mAOD).

Rev	Date	Description
C01	01/03/2025	Issued for construction
P02	10/12/2024	Issued for review

Client: Northvale County Council
Designer: Arden Moss Consulting Engineers
Kestrel Valley Link Road
River Kest Bridge East Abutment General Arrangement
Drawing number: KVL-ADM-410-DR-S-0102
Revision: C01 Status: FC - For construction
Scale: 1:100 @ A1 Date: 1 March 2025
Drawn: LC Checked: PN Approved: DO