


SECTION THROUGH MILL LANE CULVERT

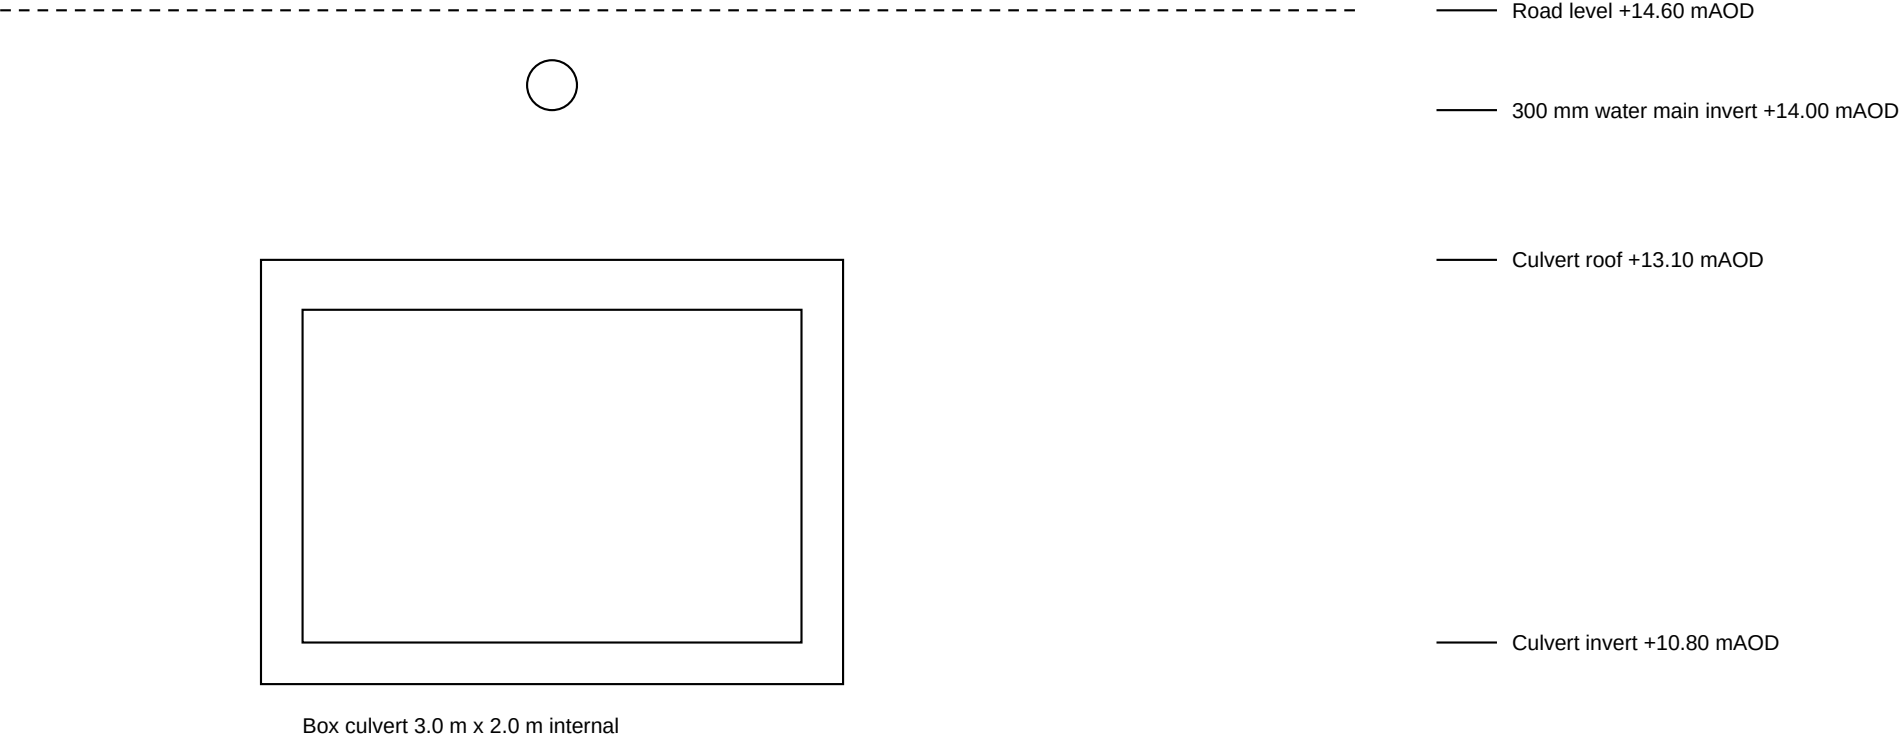

- NOTES**
- 1. Precast concrete box culvert, 3.0 m x 2.0 m internal, carrying Mill Brook under the link road.
  - 2. Invert level +10.80 m AOD. Roof slab 300 mm.
  - 3. Existing 300 mm water main shown from utility records at +14.00 m AOD - to be confirmed by trial holes.

| Rev                                                                                                                                                                                                                                                                                                                                                                | Date       | Description       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------|
| P01                                                                                                                                                                                                                                                                                                                                                                | 20/11/2024 | Issued for review |
| Client: Northvale County Council<br>Designer: Arden Moss Consulting Engineers<br><b>Kestrel Valley Link Road</b><br><b>Mill Lane Culvert General Arrangement</b><br>Drawing number: KVL-ADM-330-DR-S-0205<br><b>Revision: P01    Status: RV - For review and comment</b><br>Scale: 1:50 @ A1    Date: 20 November 2024<br>Drawn: LC    Checked: PN    Approved: DO |            |                   |